

## Table Of Content

<b>Journal Cover</b>	2
<b>Author[s] Statement</b>	3
<b>Editorial Team</b>	4
<b>Article information</b>	5
Check this article update (crossmark)	5
Check this article impact	5
Cite this article	5
<b>Title page</b>	6
Article Title	6
Author information	6
Abstract	6
<b>Article content</b>	7

**ISSN (ONLINE) 2598-9936**



**INDONESIAN JOURNAL OF INNOVATION STUDIES**  
PUBLISHED BY  
UNIVERSITAS MUHAMMADIYAH SIDOARJO

## Originality Statement

The author[s] declare that this article is their own work and to the best of their knowledge it contains no materials previously published or written by another person, or substantial proportions of material which have been accepted for the published of any other published materials, except where due acknowledgement is made in the article. Any contribution made to the research by others, with whom author[s] have work, is explicitly acknowledged in the article.

## Conflict of Interest Statement

The author[s] declare that this article was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

## Copyright Statement

Copyright © Author(s). This article is published under the Creative Commons Attribution (CC BY 4.0) licence. Anyone may reproduce, distribute, translate and create derivative works of this article (for both commercial and non-commercial purposes), subject to full attribution to the original publication and authors. The full terms of this licence may be seen at <http://creativecommons.org/licences/by/4.0/legalcode>

# Indonesian Journal of Innovation Studies

Vol. 25 No. 2 (2024): April

DOI: 10.21070/ijins.v25i2.1068 . Article type: (Innovation in Industrial Engineering)

## EDITORIAL TEAM

### Editor in Chief

Dr. Hindarto, Universitas Muhammadiyah Sidoarjo, Indonesia

### Managing Editor

Mochammad Tanzil Multazam, Universitas Muhammadiyah Sidoarjo, Indonesia

### Editors

Fika Megawati, Universitas Muhammadiyah Sidoarjo, Indonesia

Mahardika Darmawan Kusuma Wardana, Universitas Muhammadiyah Sidoarjo, Indonesia

Wiwit Wahyu Wijayanti, Universitas Muhammadiyah Sidoarjo, Indonesia

Farkhod Abdurakhmonov, Silk Road International Tourism University, Uzbekistan

Bobur Sobirov, Samarkand Institute of Economics and Service, Uzbekistan

Evi Rinata, Universitas Muhammadiyah Sidoarjo, Indonesia

M Faisal Amir, Universitas Muhammadiyah Sidoarjo, Indonesia

Dr. Hana Catur Wahyuni, Universitas Muhammadiyah Sidoarjo, Indonesia

Complete list of editorial team ([link](#))

Complete list of indexing services for this journal ([link](#))

How to submit to this journal ([link](#))

## Article information

**Check this article update (crossmark)**



**Check this article impact (\*)**



**Save this article to Mendeley**



(\*) Time for indexing process is various, depends on indexing database platform

## Advancements in Expanded Clay Manufacturing Using "Clay-Desert Sand-Oil Sludge" Sludge Composite Materials

*Kemajuan dalam Pembuatan Tanah Liat yang Diperluas Menggunakan Bahan Komposit "Tanah Liat-Pasir Gurun Pasir-Lumpur Minyak"*

**Narmanova Roza Abdibekovna, roza\_an@mail.ru, (1)**

*Korkyt Ata Kyzylorda University, Kazakhstan*

<sup>(1)</sup> Corresponding author

### Abstract

This study explores the development of resource-saving expanded clay technology utilizing underutilized clay raw materials and oil extraction waste. Traditional expanded clay production is energy-intensive and often employs high-quality clay; however, our research identifies technological modes and parameters for producing expanded clay through plastic molding, incorporating substandard raw materials and oil sludge. This method eliminates the need for costly energy-releasing additives and reduces energy costs associated with drying and firing by 25-30%. The research aims to demonstrate the feasibility of this novel production technique in the Republic of Kazakhstan, considering the local availability of raw materials, energy resources, and regional demand for thermal insulation materials in industrial and civil construction. Our findings suggest that integrating 'Desert Sand-Oil Sludge' into the batch composition can effectively produce granulated porous thermal insulation material, aligning with the region's development strategy and offering significant economic and environmental benefits.

### Highlights:

- **Resource Utilization:** Uses oil waste and substandard clay to produce expanded clay, reducing reliance on high-quality materials.
- **Energy Savings:** Cuts energy costs for production by 25-30% through innovative processing.
- **Regional Benefit:** Aligns with Kazakhstan's strategy by utilizing local resources and supporting construction needs.

**Keywords:** Expanded Clay, Oil Sludge, Desert Sand

Published date: 2024-04-16 00:00:00

## Introduction

Traditionally, the raw materials for the production of expanded clay are sedimentary clay rocks. Most suitable are montmorillonite and mica clays containing no more than 30% quartz [1]. It is known that in many CIS Republics, nearby raw material deposits already worked out or their extraction is accompanied by increasing the depth of occurrence, waterlogging, complicating geological conditions, and increasing the delivery arm due to the distance of explored but not yet involved in the technological process reserves. This leads to a significant increase in the cost of expanded clay [2].

The need to replace raw material sources for the production of expanded clay also arises at the expanded clay plant in Kazakhstan, as the reserves of highly plastic montmorillonite clays are limited [3]. Importing the main raw materials, i.e., clay materials from other regions leads to an increase in the cost of finished products by more than 35%. Therefore, eliminating the increase in production costs at the expanded clay plant is possible by involving new types of raw materials that could replace clays near the production site [4]. From the variety of natural and technogenic raw material resources in Kazakhstan, weakly-expanding loess-like clays available in almost all regions are of the greatest interest for the production of expanded clay [5], [6]. The suitability of any clay raw material for the production of expanded clay is established by special research of its properties. The most important requirement for the raw materials is expansion during firing. Research in this direction is actively conducted abroad and described in the works of authors [7], [8].

The second requirement for the raw material is fusibility. However, due to the peculiarities of the chemical-mineralogical and instability of the chemical composition of loess-like clays, the firing of products does not ensure full expansion processes ( $t = 1180...1200$  °C), which excludes the production of granulated porous materials like "expanded clay" without adjusting the component composition of the ceramic mass [9], [10]. Such raw material requires impoverishment or plasticization [11]. For example, studies conducted over bentonite clays of the Kazakh deposit have established that the tested clay in its natural state does not expand, however, the introduction of corrective additives slightly improves the expansion [12], [13].

Therefore, to obtain lightweight ceramic products with increased porosity and reduced thermal conductivity [14], pore-forming additives are introduced into the raw material mass - substances that dissociate at the firing temperature with the release of carbon dioxide (clay loam, gel, ground dolomite, chalk) as well as substances that burn out during firing (sawdust, cinder, ground coke, coke sludge, peat dust) [15]. However, the known fuel-containing additives in the form of coal, gas, diesel fuel, etc., used as energy carriers in the technology of construction ceramics are associated with high costs [16]. Therefore, it is of interest to consider as a puffing additive the waste from oil extraction and refining. For this, there are unlimited opportunities today since the resources of technogenic formations in the form of oil sludges and asphalt-resin-paraffin deposits, in particular at oil extraction enterprises, are sufficient [17]. According to studies, the "reserves" of oil sludges exceed 100 million tons in Russia, 20 million tons in Azerbaijan, 40 million tons in Kazakhstan, and 5 million tons in Ukraine [18].

In both domestic and foreign literature, there is a significant number of developments dedicated to the study of the technology of expanded clay based on well-, medium-, and weakly-expanding clays and loams [19]. In this case, the production of effective expanded clay based on weakly-expanding clays is resolved by adding burning additives such as fuel oil, coal, thermal power plant ash, etc. Studies by authors [20] are dedicated to the production of expanded clay using oil sludge waste and expanded clay concrete based on it.

Authors studied the physicochemical properties of oil sludges formed as a result of the industrial development of hydrocarbon raw material deposits in the South Turgay depression, containing mineral particles (50-75%), crude oil (20-40%), and water (5-10%), and methods for cleaning soils from oil contamination in the arid climate of the Republic of Kazakhstan [21]. They analyzed the influence of oil sludges on the physicochemical changes in the macro- and microstructure of foam concrete. It was determined that the organic part of the oil sludges is combustible and flammable, with a calorific value of 2500-3500 kcal/kg, which is equivalent to the calorific value of coal [22].


In work, the results of studies dedicated to the development of optimal compositions of raw material mixtures based on weakly-expanding clayey rock from the Kyzylorda region in the composition "oil sludge-desert sand" for obtaining granulated porous thermal insulation material of the type "expanded clay" are presented [23]. As a fuel-containing burning and strengthening additive to reduce energy costs and give maximum expansion and strength to the finished product, bottom oil sludge from the reservoirs of JSC "Petro Kazakhstan Kumkol Resources" and desert sand from the Kyzylorda deposit were used [24].

The goal of the study is to develop methods for managing the technological process of obtaining a conglomerate mixture "Desert Sand-Oil Sludge" [25] semi-finished product from loam and conglomerate mixture, and to develop technologies for the production of expanded clay based on them. Also, the selection of equipment according to the proposed technological scheme is carried out [26].

## Methods

The objects of study are the compositions and technology of thermal insulation material of the type "expanded clay" obtained on the basis of weakly-expanding loams and desert sand from the Kyzylorda deposit, using as a fuel-containing burning and expanding additive - oil sludge that is formed as a result of the industrial development of hydrocarbon raw material deposits in the South Turgay depression (on the example of JSC "Petro Kazakhstan Kumkol Resources") [27].

## Results and Discussion

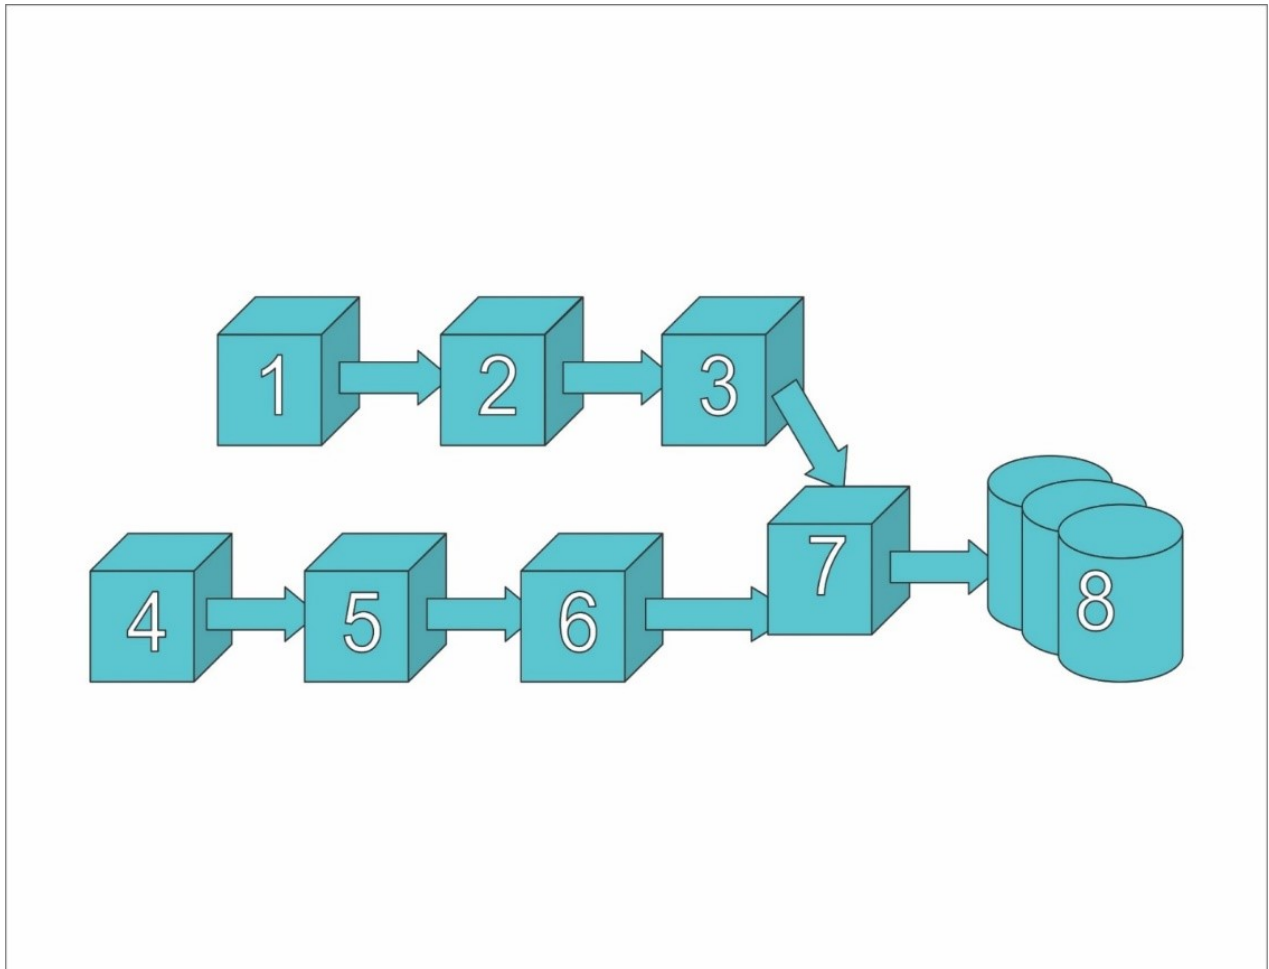

**Figure 1.** Block Diagram of the Technological Process of Converting Oil Sludge

Block diagram of the technological process of converting oil sludge into a conglomerate state: [28]

1. Container for oil sludge
2. Volume dosing (Volume doser)
3. Screw conveyor
4. Storage of desert sand raw material
5. Volume dosing (Volume doser)
6. Belt conveyor
7. Joint mixing (Twin-shaft mixer)
8. Bunker for organomineral conglomerate mixture

Thus, the proposed technological line for the production of expanded clay should include an additional line: [29]



1. Unit for preparing the conglomerate mixture "oil sludge-desert sand"
2. Warehouse for the conglomerate mixture "oil sludge-desert sand"
3. Mixing unit of the conglomerate mixture with loam to obtain ceramic mass

According to the proposed technology, drying and firing are carried out in two stages: the first stage - comparatively slow heating of granules to a temperature of 200-500°C and the second stage - rapid heating to a temperature of 1180-1200°C and maintaining at this temperature for 3-10 minutes. The quality of expanded clay gravel from weakly-expanding clays depends mainly on good homogenization of the clay mass with the conglomerate mixture "Desert Sand-Oil Sludge" before forming raw granules [30].

## Conclusions

The developed technology for obtaining expanded clay using oil sludge is oriented towards the use of weakly-expanding and non-expanding clayey rocks of Kazakhstan. It was established that the physicochemical and technological properties of the raw materials used suggest choosing a plastic method of processing and forming expanded clay - as the most promising in terms of resource and energy efficiency. The selection of technological equipment for the production of expanded clay according to the proposed technology has been conducted. Implementing the developed expanded clay technology allows for the abandonment of costly energy-releasing additives and reduces energy expenditures for drying and firing products by 25-30%. A decisive factor in choosing the location for organizing expanded clay production is the availability of raw materials and sufficient energy resources, as well as the demand for the final product for industrial and civil construction, considering the development strategy of the Aral Sea region of the Republic of Kazakhstan.

## References

1. E. Fakhfakh, W. Hajjaji, M. Medhioub, F. Rocha, A. López-Galindo, M. Setti, F. Kooli, F. Zargouni, and F. Jamoussi, "Effects of Sand Addition on Production of Lightweight Aggregates from Tunisian Smectite-Rich Clayey Rocks," *Applied Clay Science*, vol. 35, pp. 228-237, 2007, doi: <https://doi.org/10.1016/j.clay.2006.09.006>.
2. C. R. Cheeseman and G. S. Viridi, "Properties and Microstructure of Lightweight Aggregate Produced from Sintered Sewage Sludge Ash," *Resources, Conservation and Recycling*, vol. 45, pp. 18-30, 2005, doi: <https://doi.org/10.1016/j.resconrec.2004.12.006>.
3. J. Declere and W. Viaene, "Rupelian Boom Clay as Raw Material for Expanded Clay Manufacturing," *Applied Clay Science*, vol. 8, pp. 111-128, 1993, doi: [https://doi.org/10.1016/0169-1317\(93\)90032-V](https://doi.org/10.1016/0169-1317(93)90032-V).
4. A.M. Salahov, V. P. Morozov, L. R. Tagirov, R. A. Salahova, N. M. Lyadov, and N. V. Boltakova, "High-Strength Ceramics from Fusible Clays," *Georesources*, Kazan, 2012, pp. 9-12.
5. V. P. Luzin, A. V. Kornilov, K. G. Nikolaev, and L. P. Luzina, "Ceramic Building Materials with Improved Thermal Insulation Properties," *Bulletin of Kazan Technological University, Kazan National Research Technological University*, Kazan, 2010, pp. 32-36.
6. V. P. Petrov, N. I. Makridin, and V. N. Yarmakovskiy, "Porous Fillers and Lightweight Concretes," *Materials Science. Technology of Production*, Samara State Architectural-Building University, Samara, 2009, p. 436.
7. B. L. A. Tuan, C.-L. Hwang, K.-L. Lin, Y.-Y. Chen, and M.-P. Young, "Development of Lightweight Aggregate from Sewage Sludge and Waste Glass Powder for Concrete," *Construction and Building Materials*, no. 47, pp. 334-343, 2013, doi: <https://doi.org/10.1016/j.conbuildmat.2013.05.039>.
8. M. Bernhardt, H. Justnes, H. Tellesbø, and K. Wiik, "The Effect of Additives on the Properties of Lightweight Aggregates Produced from Clay," *Cement and Concrete Composites*, vol. 53, pp. 233-238, 2014, doi: <https://doi.org/10.1016/j.cemconcomp.2014.07.005>.
9. S. Volland, O. Kazmina, V. Vereshchagin, and M. Dushkina, "Recycling of Sand Sludge as a Resource for Lightweight Aggregates," *Construction and Building Materials*, vol. 52, pp. 361-365, 2014, doi: <https://doi.org/10.1016/j.conbuildmat.2013.10.088>.
10. N. G. Valiev, Z. Dzh. Efendieva, T. R. Osmanly, "Study of Low-Quality Bentonitic Clays of Azerbaijan for the Production of Keramsite," *Izvestiya TulGU. Sciences of the Earth*, 2022, issue 3, pp. 77-91.
11. I. A. Rasulov, "Study of the Technological Features of Keramsite from Clayey Rocks of Uzbekistan and Southern Kazakhstan," Tashkent, 1968.
12. T. T. Sabirov, S. S. Tairov, Z. R. Kadyrova, and A. M. Eminov, "Development of Compositions of Masses for Ceramic Tiles Using Logonskaya Bentonitic Clay as a Plastifying Component," *Uzbek Chemical Journal*, no. 3, 2019, pp. 42-49.
13. E. A. Kolesnikov, "Expanding Fusible Clays," *Glass and Ceramics*, no. 5, pp. 28-30, 1974.
14. E. Mestnikov, "Clay Raw Materials of Yakutia for the Production of Keramsite," *Modern High-Tech Technologies*, no. 3, pp. 30-34, 2022; URL: <https://top-technologies.ru/ru/article/view?id=39069> (accessed on 28.09.2023).
15. S. P. Onatsky, "Production of Keramsite," 3rd ed., revised and supplemented, Moscow: Stroyizdat, 1987, p. 333.

16. V. P. Petrov, N. I. Makridin, and V. N. Yarmakovskiy, "Porous Fillers and Lightweight Concretes," *Materials Science. Technology of Production: Textbook*, Samara State Architectural-Building University, Samara, 2009, p. 436.
17. E. Mestnikov, "Clay Raw Materials of Yakutia for the Production of Keramsite," *Modern High-Tech Technologies*, no. 3, pp. 30-34, 2022, URL: <https://top-technologies.ru/ru/article/view?id=39069> (accessed on 28.09.2023).
18. N. G. Valiev, Z. Dzh. Efendieva, and T. R. Osmanly, "Study of Low-Quality Bentonitic Clays of Azerbaijan for the Production of Keramsite," *Izvestiya TulGU. Sciences of the Earth*, 2022, issue 3, pp. 77-91.
19. A. Pavlenko, A. Cheilytko, O. Lymarenko, and O. Taranenko, "Development of a New Method for Obtaining Claydite with a Minimal Thermal Conductivity Coefficient," *Eastern-European Journal of Enterprise Technologies*, 2017, doi: 10.15587/1729-4061.2017.101089.
20. V. S. Komissarenko, A. G. Chiknovoryan, and Y. A. Luponosov, "Experience of Producing Keramsite Using Oil Sludge Wastes and Keramsite Concrete Based on It," *Modern Technologies of Construction and Gas Transportation Systems: Proceedings of the Samara Branch of the Section "Construction" RIA*, Samara, 1994, issue 1, pp. 24-28.
21. A. Elkonyuk and Y. A. Luponosov, "Obtaining Keramsite and Keramsite Concrete Based on It Using Oil Sludge Wastes," *Research in the Field of Architecture, Construction, and Environmental Protection: Abstracts of the 55th Scientific-Technical Conference, SamGASA*, Samara, 1997, pp. 86-87.
22. Y. A. Luponosov, "Obtaining Keramsite Using Oil Sludge Wastes," *Abstract of dissertation*, Samara, 1998, p. 17.
23. S. A. Montaev, N. B. Adilova, A. S. Montaeva, and A. S. Montaeva, "Development of Effective Technological Parameters for Formation of a Porous Structure of the Raw Composition in Order to Obtain a Lightweight Granular Insulation Material," *APRN Journal of Engineering and Applied Sciences*, vol. 11, no. 17, pp. 10454-10459, 2016.
24. B. Magid, A. V. Kuptsov, and R. A. Shaybakov, "Technological Processes of Oil Sludge Processing," *Bulletin of AtING*, no. 6-7, 2005, pp. 82-86.
25. F. Akhmetov, M. N. Akhmetshina, A. A. Desyatkin, and F. Sh. Khafizov, "Obtaining Stable Fuel Compositions Using Oil Sludge," *Oil Processing and Petrochemistry with Domestic Technologies in the 21st Century: Abstracts of the II Congress of the Oil and Gas Industrialists of Russia*, Ufa: IPNHP, 2000, p. 164.
26. F. Akhmetov, M. N. Akhmetshina, A. A. Desyatkin, and F. Sh. Khafizov, "Creating Aggregate-Stable Fuel Mixtures Based on Heavy Boiler Fuel and Oil Sludge," *Chemical Reagents, Reagents and Processes of Small-Tonnage Chemistry: Abstracts of the XIII International Scientific-Practical Conference*, Ufa: Reactive, 2000, p. 124.
27. O. I. Ruchkinova, "Development of Resource-Saving Technologies for Safe Disposal of Solid Oil Extraction Wastes," *Abstract of the dissertation*, Perm, 2004, p. 35.
28. T. V. Funtikova, L. I. Akhmetov, I. F. Puntus, P. A. Mikhailov, N. O. Appazov, R. A. Narmanova, A. E. Filonov, and I. P. Solyanikova, "Bioremediation of Oil-Contaminated Soil of the Republic of Kazakhstan Using a New Biopreparation," *Microorganisms*, vol. 11, no. 2, p. 522, 2023, doi: <https://doi.org/10.3390/microorganisms11020522>.
29. K. A. Bissenov, S. S. Uderbayev, and N. A. Saktaganova, "Physicochemical Analysis of Structure of Foamed Concrete with Addition of Oil Sludges," *Research Journal of Pharmaceutical, Biological and Chemical Sciences*, vol. 7, no. 4, p. 1701-1708, 2016.
30. K. A. Bisenov, R. A. Narmanova, N. O. Appazov, "Physical and Chemical Studies of the Oil Sludge Hydrocarbon Composition and the Prospects for Their Use in the Technology of Expanded Clay Production," *News of the National Academy of Sciences of the Republic of Kazakhstan-Series Chemistry and Technology*, 2020, vol. 5, p. 28-37, doi: 10.32014/2020.2518-1491.77.